



Tiger[®] DuraCore

8 strand plastic impregnated design with a unique core construction

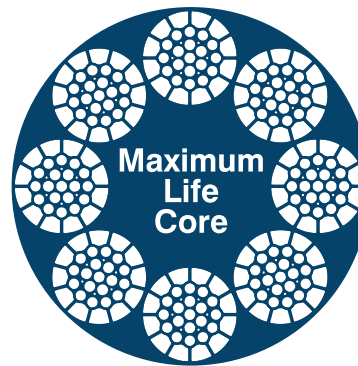

product benefits

- ✓ Up to 20% longer rope life versus standard design
- ✓ Made to enhance performance and life through improved core support of outer strands
- ✓ Engineered with unique polymer formulation - resilient in extreme temperatures
- ✓ Designed to inhibit abrasion and bending fatigue
- ✓ Tested in extreme conditions

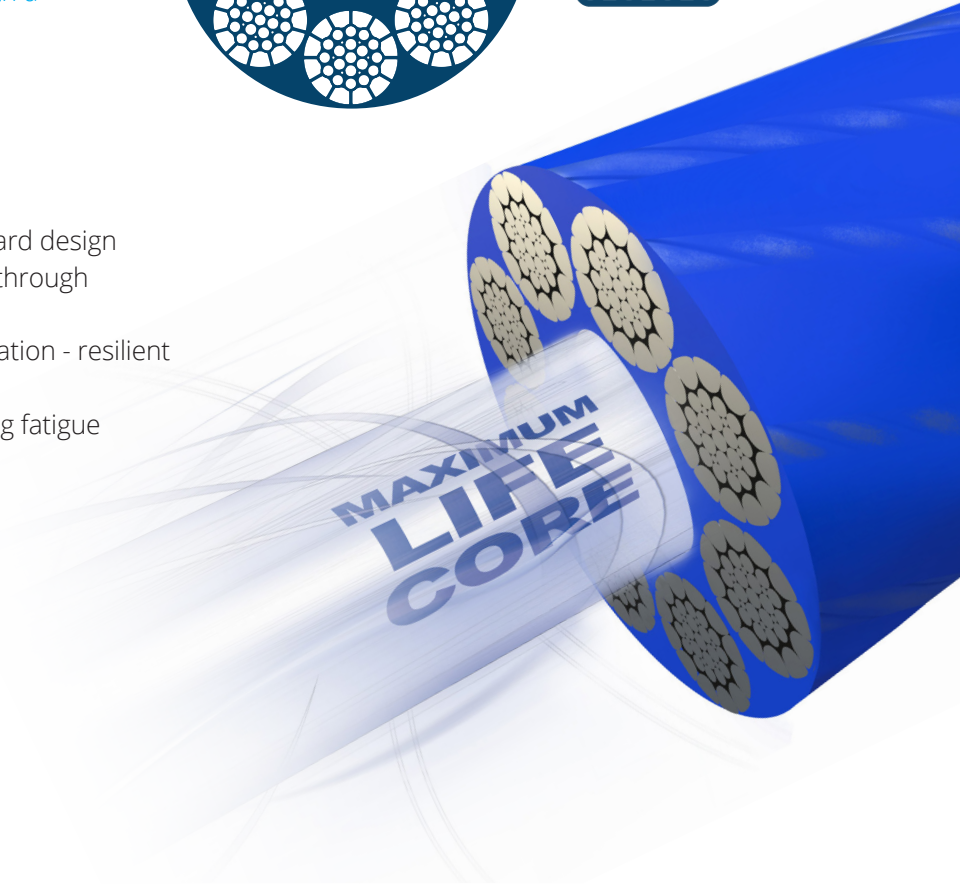

Rope Diameter		Weight Approx.		Minimum Breaking Force	
Inch	mm	lb/ft	kg/m	tons (2000 lbs)	metric tons
1-3/4	45	5.85	8.70	161	146
1-7/8	48	6.75	10.00	185	168
2	51	7.70	11.50	209	190
2-1/8	54	8.65	12.90	235	213
2-1/4	57	9.78	14.60	263	239
2-3/8	60	10.80	16.10	290	263
2-1/2	64	12.00	17.90	321	291
2-5/8	67	13.25	19.70	353	320
2-3/4	70	14.48	21.50	385	349
2-7/8	73	15.81	23.50	418	379

This table is for guidance purposes only with no guarantee or warranty (express or implied) as to its accuracy. The products described may be subject to change without notice, and should not be relied on without further advice from Bridon-Bekaert. The cross section image is for reference only. Actual cross sections vary due to diameter. Visit www.bridon-bekaert.com for the most up-to-date data.